

# Test Equipment Solutions Datasheet

Test Equipment Solutions Ltd specialise in the second user sale, rental and distribution of quality test & measurement (T&M) equipment. We stock all major equipment types such as spectrum analyzers, signal generators, oscilloscopes, power meters, logic analysers etc from all the major suppliers such as Agilent, Tektronix, Anritsu and Rohde & Schwarz.

We are focused at the professional end of the marketplace, primarily working with customers for whom high performance, quality and service are key, whilst realising the cost savings that second user equipment offers. As such, we fully test & refurbish equipment in our in-house, traceable Lab. Items are supplied with manuals, accessories and typically a full no-quibble 2 year warranty. Our staff have extensive backgrounds in T&M, totalling over 150 years of combined experience, which enables us to deliver industry-leading service and support. We endeavour to be customer focused in every way right down to the detail, such as offering free delivery on sales, covering the cost of warranty returns BOTH ways (plus supplying a loan unit, if available) and supplying a free business tool with every order.

As well as the headline benefit of cost saving, second user offers shorter lead times, higher reliability and multivendor solutions. Rental, of course, is ideal for shorter term needs and offers fast delivery, flexibility, try-before-you-buy, zero capital expenditure, lower risk and off balance sheet accounting. Both second user and rental improve the key business measure of Return On Capital Employed.

We are based near Heathrow Airport in the UK from where we supply test equipment worldwide. Our facility incorporates Sales, Support, Admin, Logistics and our own in-house Lab.

All products supplied by Test Equipment Solutions include:

- No-quibble parts & labour warranty (we provide transport for UK mainland addresses).
- Free loan equipment during warranty repair, if available.
- Full electrical, mechanical and safety refurbishment in our in-house Lab.
- Certificate of Conformance (calibration available on request).
- Manuals and accessories required for normal operation.
- Free insured delivery to your UK mainland address (sales).
- Support from our team of seasoned Test & Measurement engineers.
- ISO9001 quality assurance.

Test equipment Solutions Ltd  
Unit 8 Elder Way  
Waterside Drive  
Langley  
Berkshire  
SL3 6EP

T: +44 (0)1753 596000  
F: +44 (0)1753 596001

Email: [info@TestEquipmentHQ.com](mailto:info@TestEquipmentHQ.com)  
Web: [www.TestEquipmentHQ.com](http://www.TestEquipmentHQ.com)



# 220 and 230 Programmable Sources




The demand on researchers, designers, and evaluation engineers for better device characterization has generated a widespread need for programmable, low-level DC sources. And, as an experienced manufacturer of automatic wafer measuring equipment, Keithley knows the importance to the user of instrument compatibility and ease of system integration. The 220 programmable current source and 230 programmable voltage source find major applications in semiconductor characterization, materials research, and ATE systems.

Both models incorporate a 100-step, programmable memory buffer, useful in applications where either a fixed number of outputs is repeated or a complex waveform of discrete steps must be generated.

In system applications, the buffer can be loaded through the bus, and the 220 or 230 can be commanded to sequence through memory while the controller is busy on other tasks.

The TRIGGER IN/OUT feature, when used in the STEP mode, allows the source to synchronize the measurements of other instruments. The TRIGGER OUT occurs after the completion of dwell time; TRIGGER IN causes the 220 or 230 to advance to its next program step. This provides the capability to perform a preset source measurement without a computer.

220 Rear Panel

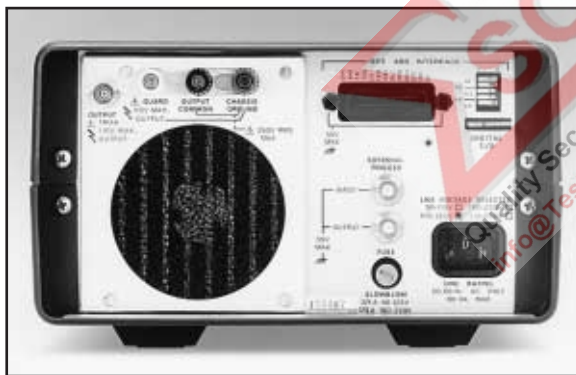

230 Rear Panel



## MODEL 220 CURRENT SOURCE

- $\pm 0.5\mu\text{A}$  to  $\pm 101\text{mA}$  DC output
- $10^{14}\Omega$  output resistance
- $\pm 1\text{V}$  to  $\pm 105\text{V}$  programmable V-LIMIT

## MODEL 230 VOLTAGE SOURCE

- $\pm 50\mu\text{V}$  to  $\pm 101\text{V}$  DC output
- $\pm 2\text{mA}$ ,  $\pm 20\text{mA}$ ,  $\pm 100\text{mA}$  programmable I-LIMIT
- Remote sensing

## ORDERING INFORMATION

- |       |   |
|-------|---|
| 220   | Programmable Current Source with instruction manual, programming guide, Model 6011 Input Leads, 1.5m (5 ft), Triax to Clips |
| 230   | Programmable Voltage Source with instruction manual and programming guide   |
| 230-1 | Programmable Voltage Source with instruction manual and programming guide (for Model 82, 82-WIN Simultaneous CV Systems)    |

This product is available with an **Extended Warranty**. See page 635 for complete ordering information.

Four TTL-compatible input and output (I/O) lines are provided on each model to receive and generate system commands. In a typical application, a source can be programmed to generate an SRQ (service request) to the controller if a system element such as a foot pedal switch, mechanical stop, or over-temperature condition is detected.

The I/O can provide a means for the customer to shut down the power supply for safety in a system environment. Digital I/O is an example of the convenience features that make the Models 220 and 230 easy to use in your test system.

The 230-1 is a special version of the 230 with the necessary connectors for compatibility with the Model 82 Simultaneous C-V Systems.

## QUESTIONS?

1-800-552-1115 (U.S. only)

Call toll free for technical assistance, product support or ordering information, or visit our website at [www.keithley.com](http://www.keithley.com).

# 220 and 230 Programmable Sources

## IEEE-488 BUS IMPLEMENTATION (220, 230)

**MULTILINE COMMANDS:** DCL, LLO, SDC, GET, GTL, UNT, UNL, SPE, SPD.

**UNILINE COMMANDS:** IFC, REN, EOI, SRQ, ATN.

**INTERFACE FUNCTIONS:** SH1, AH1, T6, TE0, L4, LE0, SR1, RL1, PP0, DC1, DT1, CO, EI.

**INTERNAL PROGRAMMABLE PARAMETERS:** Display Mode, Output, Prefix Data Format, EOI, SRQ (including mask for over Limit), Program Mode, Range, Trigger Mode, Terminator Character, Inputs (Source, Limit, Dwell Time, 100-Point Memory Locations), Output Status, Digital Self Test.

**DIGITAL I/O PORT:** A separate I/O port consisting of four input and four output lines as well as common (IEEE-488) and +5V DC. Outputs will drive one TTL load. Inputs represent one TTL load. The 220 or 230 can be programmed to generate an "SRQ" upon any change in the four bit input data. Mating connector supplied.

## ACCESSORIES AVAILABLE

### TEST LEADS (220)

6011 Input Leads, 2-Slot Male Triax to Alligator Clips, 1.5m (5 ft)

6011-10 Input Leads, 2-Slot Male Triax to Alligator Clips, 3m (10 ft)

### CABLES (220 & 230)

7007-1 Shielded IEEE-488 Cable, 1m (3.3 ft)

7007-2 Shielded IEEE-488 Cable, 2m (6.6 ft)

7008-3 IEEE-488 Digital Cable, 0.9m (3 ft)

7008-6 IEEE-488 Digital Cable, 1.8m (6 ft)

7024-3 Low Noise Triax Cable, 0.9m (3 ft) (220 only)

7024-10 Low Noise Triax Cable, 3m (10 ft) (220 only)

### ADAPTERS (220)

6146 Triax Tee Adapter

6147 2-Slot Male Triax to Female BNC Adapter

6167 Guarded Input Adapter

6172 2-Slot Male to 3-Lug Female Triax Adapter

### RACK MOUNT KITS (220 & 230)

10191 Single Fixed Rack Kit

10192 Dual Fixed Rack Kit

4288-4 Rack Mount Kit

See page 235 for descriptions of all accessories.

## QUESTIONS ?

1-800-552-1115 (U.S. only)

Call toll free for technical assistance, product support or ordering information, or visit our website at [www.keithley.com](http://www.keithley.com).

## MODEL 220 CURRENT SOURCE

RANGE	MAXIMUM OUTPUT	ACCURACY (1 Year) 18°-28°C	STEP SIZE	TEMPERATURE COEFFICIENT/°C 0°-18°C & 28°-50°C	NOISE (pk-pk of range)	3dB BANDWIDTH
100 mA	±101.00 mA	0.1 % + 50 µA	50 µA	0.01 % + 2 µA	100 ppm	0.1 Hz to 30 kHz
10 mA	±19.995 mA	0.05% + 10 µA	5 µA	0.005% + 200 nA	100 ppm	0.1 Hz to 100 Hz
1 mA	±1.9995 mA	0.05% + 1 µA	500 nA	0.005% + 20 nA	100 ppm	0.1 Hz to 100 Hz
100 µA	±199.95 µA	0.05% + 100 nA	50 nA	0.005% + 2 nA	100 ppm	0.1 Hz to 100 Hz
10 µA	±19.995 µA	0.05% + 1 nA	5 nA	0.005% + 200 pA	100 ppm	0.1 Hz to 100 Hz
1 µA	±1.9995 µA	0.1 % + 1 nA	500 pA	0.01 % + 20 pA	100 ppm	0.1 Hz to 100 Hz
100 nA	±199.95 nA	0.3 % + 100 pA	50 pA	0.02 % + 2 pA	100 ppm	0.1 Hz to 100 Hz
10 nA	±19.995 nA	0.3 % + 10 pA	5 pA	0.02 % + 200 fA	200 ppm	0.1 Hz to 10 Hz
1 nA	±1.9995 nA	0.4 % + 2 pA	500 fA	0.02 % + 200 fA	400 ppm	0.1 Hz to 10 Hz

**OUTPUT RESISTANCE:** >10<sup>14</sup>Ω (on 1nA range).

**OUTPUT CAPACITANCE:** <20pF

**LINE REGULATION:** <0.01% for AC power line changes within specified limits.

**VOLTAGE LIMIT:** Bipolar, 1V to 105V in 1V programmable steps.

**RESPONSE TIME:** <3ms to within 0.1% of programmed change.

**TRANSIENT RECOVERY TIME:** <3ms to rated accuracy following any change in compliance voltage.

**GUARD OUTPUT:**

**Maximum Load Capacitance:** 10nF

**Maximum Load Current:** Absolute total (Output + Guard) not to exceed 105mA.

**Accuracy:** ±1mV (excluding output lead voltage drop).

**PROGRAM MEMORY:**

**Number of Locations:** 100.

**Range of Dwell Times:** 3ms to 999.9s.

**Accuracy of Dwell Time:** ±(0.05%+200µs).

**OUTPUT LOAD:** Output load must be non-inductive.

**EXTERNAL TRIGGER:** TTL-compatible EXTERNAL TRIGGER INPUT and OUTPUT.

**OUTPUT CONNECTIONS:** Teflon® insulated 2-lug triax connector (Specialty Connector #30JR121-1) for output; five-way binding posts for GUARD, OUTPUT COMMON, and CHASSIS; BNC (chassis isolated) connectors for EXTERNAL TRIGGER INPUT and OUTPUT, Amphenol or Cinch Series 87 IEEE and printed circuit digital I/O port. All connections on rear panel.

## MODEL 230 VOLTAGE SOURCE

RANGE	MAXIMUM OUTPUT	ACCURACY (1 Year) 18°-28°C	STEP SIZE	TEMPERATURE COEFFICIENT/°C 0°-18°C & 28°-50°C
100 V	±101.00 V	0.05 % + 50 mV	50 mV	0.005% + 0.5 mV
10 V	±19.995 V	0.05 % + 10 mV	5 mV	0.005% + 100 µV
1 V	±1.9995 V	0.05 % + 1 mV	500 µV	0.005% + 25 µV
100 mV	±199.9 mV	0.075% + 300 µV	50 µV	0.01 % + 25 µV

**MAXIMUM CURRENT LIMIT:** ±100mA (-0,+20%).

**SELECTABLE CURRENT LIMIT:** ±100mA, ±20mA, ±2mA (-0,+20%).

**LINE REGULATION:** <0.01% for AC power line changes within specified limits.

**NOISE:** (150µV + 50ppm range) p-p, 0.1Hz to 300Hz; 5mV p-p, 0.1Hz to 300kHz. Specification applies for local sensing only, typical.

**RESPONSE TIME:** <3ms to within 0.1% of programmed change for Current Limit of at least 20mA.

**TRANSIENT RECOVERY TIME:** <3ms to rated accuracy for Current Limit of at least 20mA.

**OUTPUT IMPEDANCE:**

SELECTED CURRENT LIMIT	OUTPUT IMPEDANCE
2 mA	1 mΩ + 10 mH
20 mA	1 mΩ + 2 mH
100 mA	1 mΩ + 1 mH

**SENSING:** Rear panel selectable REMOTE and LOCAL sensing.

**REMOTE SENSING:**

**Maximum Lead Drop (per lead):** 0.5V.

**Maximum Sense Lead Resistance (per lead):** 5Ω.

**PROGRAM MEMORY:**

**Number of Locations:** 100.

**Range of Dwell Times:** 3ms to 999.9s

**Accuracy of Dwell Time:** ±(0.05% + 200µs).

**EXTERNAL TRIGGER:** TTL-compatible EXTERNAL TRIGGER INPUT and OUTPUT.

**OUTPUT CONNECTIONS:** Five-way binding posts for OUTPUT, OUTPUT SENSE, COMMON, COMMON SENSE, and CHASSIS GROUND; BNC (chassis isolated) connectors for EXTERNAL TRIGGER INPUT and OUTPUT. All connections on rear panel.

## GENERAL (220, 230)

**DISPLAY:** 0.5 in LED digits, 4½-digit signed mantissa, 1-digit signed exponent.

**SYSTEMS COMPATIBILITY:** IEEE-488-1978.

**LIMIT INDICATIONS:**

**Model 220 (Voltage Limit):** "V-LIMIT" LED will blink.

**Model 230 (Current Limit):** "I-LIMIT" LED will blink.

**MAXIMUM ALLOWABLE COMMON MODE VOLTAGE (OUTPUT or OUTPUT COMMON to CHASSIS):** 250V rms, DC to 60Hz.

**SELF TEST:** Digital RAM, ROM, front panel LEDs upon power ON.

**EMC:** Conforms to European Union Directive 89/336/EEC.

**SAFETY:** Conforms to European Union Directive 73/23/EEC (meets EN61010-1/IEC 1010).

**WARM-UP:** 1 hour to rated accuracy.

**POWER:** 105-125 or 210-250V AC (internal switch selected), 50 or 60Hz, 60W maximum (80VA maximum). 90-105 or 180-210V AC operation available.

**COOLING:** Internal fan for forced air cooling.

**ENVIRONMENTAL LIMITS: Operating:** 0°-50°C; up to 35°C at 70% non-condensing relative humidity. **Storage:** -25° to 70°C.

**DIMENSIONS, WEIGHT:** 127mm high × 216mm wide × 359mm deep (5 in × 8½ in × 14¼ in). Net weight 4.4kg (9 lb 11 oz).

**ACCESSORIES SUPPLIED (220):** Model 6011 Triaxial Test Lead (3 ft). **(220, 230):** Instruction manual, programming guide.